

FCA 140

AUTOMATIC DOUBLE-CLIPPER



Poly-clip System Features

- ★ Tool-free quick-change system (punch, die)
- ★ Hygienic conveyor belt quick and easy dismantle and effortless to clean
- ★ Poly-clip typical hygienic design

Why clip with FCA 140?

Flexibility and product versatility in the mid-size calibre range at up to 156 cycles per minute as well as shortest downtimes distinguish the FCA 140. The automatic double-clipper closes collagen casings up to 58 mm, fibrous casings up to 90 mm and plastic casings up to 150 mm in diameter (depending on the material thickness).

Medium automation

- For the 38 – 150 mm calibre range at up to 156 cycles per minute in continuous mode
- Shortest down-time for reloading of casing and maintenance, with even higher safety
- Fully hygienic conveyor belt, dismantling without tools
- Optimal accessibility for ease of cleaning

Excellence in Clipping

poly-clip®
SYSTEM

DETAILS



Advantages

- Safety casing brake with hand guard; maintaining safety distance to separator when adjusted, operation without casing brake is blocked
- R-ID Clip with high holding force, even up to bacteria-proof clip closure with plastic casings
- Incorrect settings are avoided by detection of the clip size and die
- Auto-Stop System, clip sensor monitoring end of clip supply on reel
- Quick-change system for punch and die without tools
- Operator-friendly with individually assignable manual functions, e.g. inching mode
- Comfortable external adjustment of the clip pressure and separator hole, without tools
- Short sausage ends, uniform pleating and clean sausage tails due to the linear voiding separator
- Highly dynamic, energy-efficient servo drive, infinitely adjustable speed
- the product parameters can be called up in the SAFETY TOUCH recipe management system
- Simple machine operation with SAFETY TOUCH – shockproof, 10" large and easy to clean
- Swivel horn, twin turret and casing brake assistant with 90° pivot point
- Low noise level
- Processes high-quality clips – certified safe for use with food by SGS INSTITUT FRESENIUS
- Clip and loop manufacture certified in accordance with ISO 22000
- USB port for data import and export

Quality and hygiene

- Robustness and long service life guaranteed by use of stainless steel
- Easy to clean due to smooth surfaces, large openings, front flap and the special separator cleaning position
- Separator cleaning flap – allows ideal accessibility

Maintenance

- Centralized lubrication strip for easy and fast maintenance
- Maintenance- and service-friendly with few wearing parts, easily accessible by swing-off side covers

Equipment options

- Consumption-oriented central lubrication for maximum reliability and service life
- Fully hygienic conveyor belt, dismantling without tools
- Casing brake assistant – semi-automatic casing brake holder system for fastest reloading of casings
- Casing end sensor
- Sensor for end of loop supply
- Pneumatic dry sausage brake, individual control of the twin turret's casing brakes as product parameter via SAFETY TOUCH
- Automatic looper GSA 20, loop left or right
- Air-free slack filling of moulded products by overspreading, sensor monitored total spreading up to 100 mm, comfort setting in front
- Twin turret with swivel horns and 90° pivot point
- Length portioning by optical sensor or mechanical length stop 1,000 mm and 1,350 mm



Fully hygienic conveyor belt, dismantling without tools



Casing brake assistant – semi-automatic casing brake holder system

- Ball joint filler connection
- String dispenser for rings
- Print mark control for centred printing format
- Intelligent Filler Clipper (IFC) Interface upon request
- Footstep

Possible combinations


ES 5000

- Labelling system for marking and traceability

Consumables

- R-ID Clip: M, L



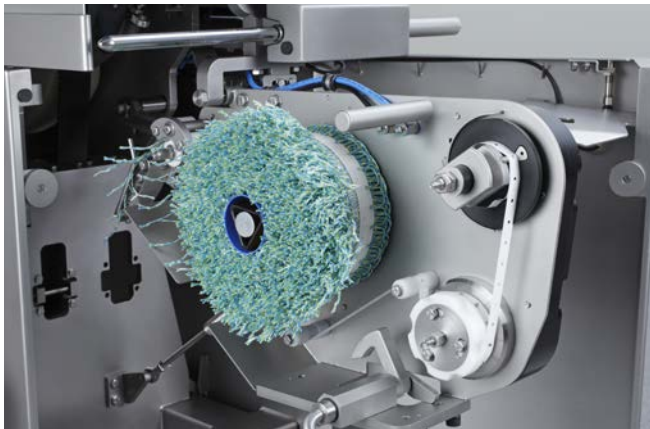

Retractable automatic loop loader GSA for easy reloading of loops

Function and operation

The automatic double clipping machine is connected mechanically and synchronized electrically to a filling machine. The portions are fed in precisely to the nearest gram and closed by a clip. The PC control allows a very fast and accurate signal processing. On the SAFETY TOUCH display the diagnostic system provides a direct and clear indication of the clipping machine's operational status as well an analysis of filling and clipping times. Deviations from the recipe parameters saved in SAFETY TOUCH are monitored. The operator is intuitively guided through the flat menu structure of the SAFETY TOUCH by means of self-explaining pictograms. Operator, set-up and service levels are kept clearly separated and are password protected. A high degree of process monitoring is offered by the FCA's automation.

Clip System Solutions


The complete system of clipping machine, clips and loops from a single source ensures efficient and trouble-free production. Original clips from Poly-clip System guarantee the highest quality. Manufacturing is subject to the most rigorous quality controls. Certified in accordance with ISO 22000 and ISO 9001 they are designed to suit the production process perfectly. With its food-proof safety coating certified by the SGS INSTITUT FRESENIUS, Poly-clip SAFE-COAT technology ensures trouble-free production and if required a no-worry product warranty. Poly-clip System is the world's leading provider of clip system solutions.




Separator cleaning flap

TECHNICAL DATA

Front view (Dimensions in mm)

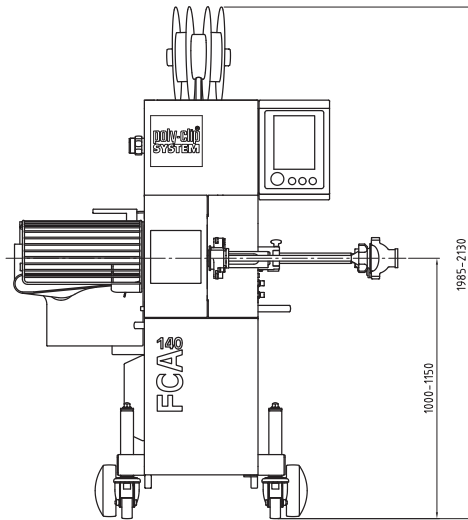

Top view | Length of stuffing horn 600 (Dimensions in mm)

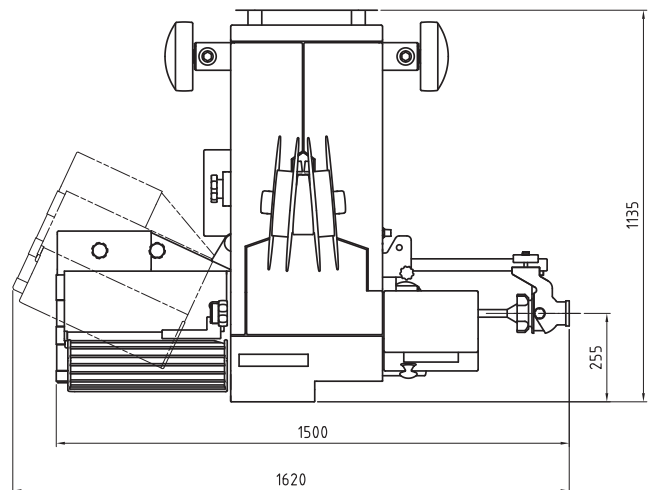

Width

**1.500 –
1.620 mm**

Depth

1.135 mm

Height

**1.985 –
2.130 mm**

Weight

550 kg
Three-phase current
connection
**200 – 240 VAC,
380 – 460 VAC,
50/60 Hz**

Power input

4 kW

Fuse connection

16 A

Compressed air

**5 – 7 bar /
0,5 – 0,7 MPa**

Air consumption

2,5 NL/Cycle

Spreading

26, 30, 36 mm

Total spreading up to

100 mm

Dimensions, weight and consumption values vary depending on the equipment and/or machine configuration.

Excellence in Clipping
