

### Why clip with PCD 700?

The special clipping machine PCD is suitable for closing stretch casings of different sizes. Typical products are cooked ham, smoked products, poultry meat as well as whole muscles which are to be processed afterwards. Large calibres up to 200 mm can be closed easily.


### **Specialist for whole muscles**

- Machine specialized in closing stretch casings
- Adjustable tension control
- Easily combines with filling machines, ham presses and funnel filling systems
- Additional safety thanks to two-handed triggering of clipping impulse
- 2 models: table-top version or on height-adjustable trolley



**Excellence** in Clipping

# DETAILS

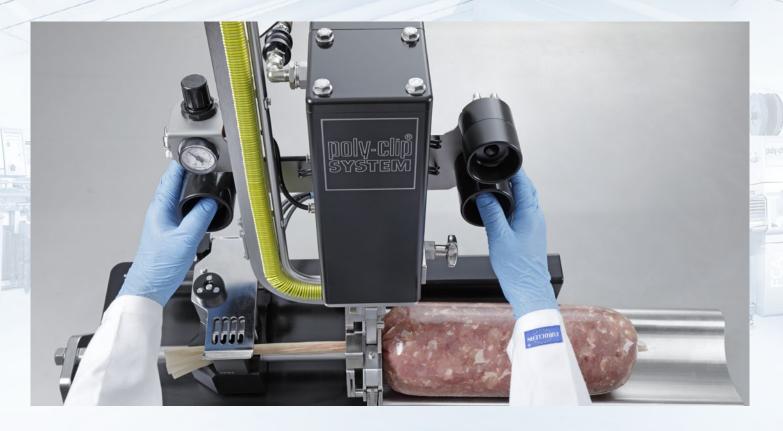

### **Advantages**

- Produces a uniform and high quality product
- Calibration of whole muscles (e. g. chop sides)
- Easy placement of casing in clamping carriage
- Additional safety thanks to two-handed triggering of clipping impulse
- Pneumatic cut-off knife for removing excess casing ends
- Easy handling as a result of combined functions: The selflocking latch closure controls the clamping and the gripping carriage

### Consumables

• S-Clip: S 735, S 740, S 744, S 747



## DETAILS



### **Function and operation**

The clipping machine PCD is pneumatically operated. The casings are pulled through the separator opening by a clamping and gripping carriage until the product meets the quality requirements. The pulling force can be increased or reduced via a pressure control valve. The clipping impulse and and cutting is then triggered by the two-handed triggering.

#### **Clip System Solutions**

The complete system of clipping machine, clips and loops from a single source ensures efficient and trouble-free production. Original clips from Poly-clip System guarantee the highest quality. Manufacturing is subject to the most rigorous quality controls. Certified in accordance with ISO 22000 and ISO 9001 they are designed to suit the production process perfectly. With its food-proof safety coating certified by the SGS INSTITUT FRESENIUS, Poly-clip SAFE-COAT technology ensures trouble-free production and if required a no-worry product warranty. Poly-clip System is the world's leading provider of clip system solutions.

# TECHNICAL DATA

#### **Table version**

| Width<br>long shell:<br>945 mm                | Width<br>short shell:<br>700 mm               | Depth<br><b>400 mm</b>                 | Working height<br>1.020 mm |
|---|---|--|----------------------------|
| Weight<br><b>32 kg</b>                        | Compressed air<br>5 – 7 bar/<br>0,5 – 0,7 MPa | Air consumption<br><b>7,5 NL/Cycle</b> |                            |
| with rolling frame                            |   |  |                            |
| Width<br>long shell:<br>945 mm                | Depth<br><b>665 mm</b>                        | Working height<br>1.745 –<br>2.055 mm  | Weight<br><b>72 kg</b>     |
| Compressed air<br>5 – 7 bar/<br>0,5 – 0,7 MPa | Air consumption<br><b>7,5 NL/Cycle</b>        |  |                            |

Dimensions, weight and consumption values vary depending on the equipment and/or machine configuration.



**Excellence in Clipping** 

Poly-clip System GmbH & Co. KG | Niedeckerstraße 1 | D-65795 Hattersheim a. M. | +49 6190 8886-0 | contact@polyclip.de | polyclip.com